





MUSSELL WHEELS

STANDARD DOUBLE FLANGE 120MM

DIMENSIONAL DATA

DFP120MM

DFG120MM

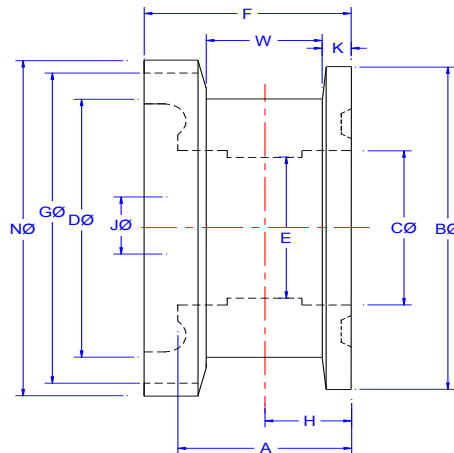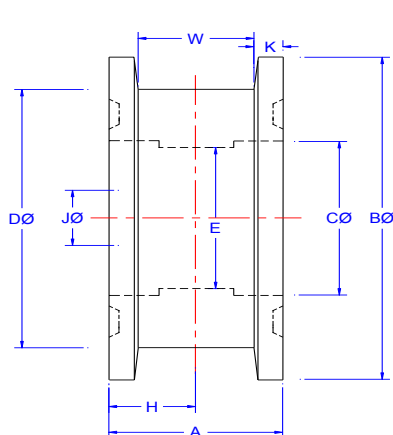

DFP =
Double Flange
Plain Wheel

DFG =
Double Flange
Geared Wheel

All Wheels
are Made of
Ductile Cast
Grade 80-55-06

***Maximum Wheel**
Loads are Based
Upon Maximum
use or
Rail Head Width

Special V-Groove
Wheels Available
Upon Request

All Dimensions are
in Millimeters &
Inches

** NOT TO SCALE
** DIMENSIONS FOR ESTIMATING
PURPOSES ONLY

MODEL	DFP120	DFG120
A	66.68 2.625"	66.68 2.625"
B	149.96 5.904"	149.96 5.904"
C	72 2.834"	72 2.834"
D Tread	120 4.724"	120 4.724"
E Clear Through	63.5 2.500"	63.5 2.500"
F	- -	79.38 3.125"
G Pitch Ø	- -	150 5.906"
H	33.34 1.3125"	33.34 1.3125"
J Axle	30 1.181"	30 1.181"
K	11.11 .4375"	11.11 .4375"
N	- -	156 6.142"
W	44.45 1.750"	44.45 1.750"
Number of Teeth	-	50 Module 3
Number of Bearings	2	2
Maximum Wheel Load*	2971 kg 6550 lbs	2971 kg 6550 lbs
Wheel Weight	13 lbs	19.4 lbs



620-B Wellington Avenue,
P.O. Box 253, Station Main,
Chilliwack, B.C. Canada
V2P 6J1
Phone: 604-792-5023
Fax: 604-792-5038
Email:
info@mussellcrane.com