


NOVA

Triple Spur Gear Enclosed Chain Block



- 🌐 LIGHT WEIGHT FOR PORTABILITY
- 🌐 LOAD CHAIN IS OF HIGH QUALITY HEAT TREATED ALLOY STEEL
- 🌐 SPECIAL STEEL BALL BEARING HOOKS VERY SHORT OPENING FACTOR
- 🌐 STD. 10 FOOT LIFT HEIGHT, EXTRA CHAIN \$ PER FOOT
- 🌐 VERY LOW HEADROOM, SHORTER HEADROOM AVAILABLE
- 🌐 HAND CHAIN 3 FOOT LESS THAN LIFT
- 🌐 UPPER AND LOWER SAFETY LATCHES INCLUDED
- 🌐 STD. "SAFETY ORANGE" FINISH WITH CAPACITY MARKINGS

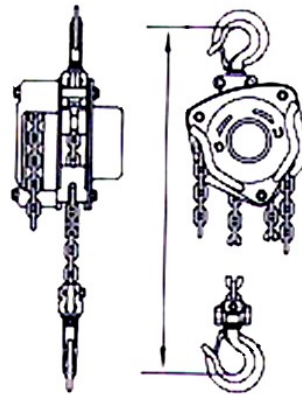

| MODEL | Cap. Tons | Safe Working Load Lb. | Test Load Tons | Standard Lift | | Number of Chain Falls | Headroom (Hook to Hook) | | Net Weight | |
|--------|-----------|-----------------------|----------------|---------------|-------|-----------------------|-------------------------|-----|------------|----|
| | | | | Feet | Meter | | in | mm | Lbs | Kg |
| NB½T | ½ | 1,100 | 0.75 | 10 | 3 | 1 | 10 3/5 | 270 | 21 | 10 |
| NB1T | 1 | 2,200 | 1.5 | | | 1 | 12½ | 317 | 26 | 12 |
| NB1.5T | 1.5 | 3,300 | 2.25 | | | 1 | 15¾ | 399 | 40 | 18 |
| NB2T | 2 | 4,400 | 3 | | | 1 | 15 1/3 | 414 | 42 | 19 |
| NB3T | 3 | 6,600 | 4.5 | | | 2 | 18 1/3 | 465 | 70 | 32 |
| NB5T | 5 | 11,000 | 6.25 | | | 2 | 25 | 636 | 101 | 46 |
| NB10T | 10 | 22,000 | 12.5 | | | 4 | 31½ | 798 | 187 | 85 |

Authorized Dealer:

MUSSELL CRANE MANUFACTURING

P.O. Box 253, 620 B Wellington Avenue, Chilliwack, B.C. Canada V2P-6J1
 Ph: (604) 792-5023 Fax: (604) 792-5038 E-mail: info@musselcrane.com
 Web-site: www.musselcrane.com